

LEZ-VPP series

Pressed steel castors with stem, wheel with standard solid rubber tyres



50–205 kg

Bracket: LEZ series


- pressed steel, zinc-plated, blue-passivated, Cr6-free
- double ball bearing in the swivel head
- minimum swivel head play and smooth rolling characteristic and increased service life due to the special dynamic Blickle riveting process
- steel plug-in stem and central kingpin bolted and secured

Wheel: VPP series

- tyre: standard solid rubber, hardness 80 Shore A, colour black
- rim: high-quality polypropylene, impact resistant, colour black

Additional details:

- bracket series: page 91
- brakes: page 112–113
- wheel series: page 189
- bearing types: page 84–85

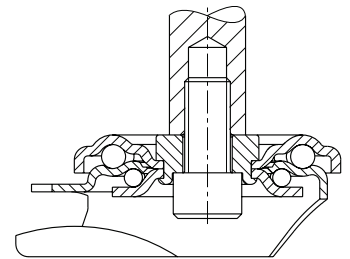

3

Swivel castors	Swivel castors with "stop-fix" brake	Wheel Ø [mm]	Tyre width [mm]	Load capacity [kg]	Bearing type	Total height [mm]	Stem Ø (D) [mm]	Stem length [mm]	Offset swivel castor [mm]
LEZ-VPP 80G	LEZ-VPP 80G-FI	80	25	50	plain bore	102	20	50	38
LEZ-VPP 100G	LEZ-VPP 100G-FI	100	30	70	plain bore	125	20	50	36
LEZ-VPP 125G	LEZ-VPP 125G-FI	125	37.5	100	plain bore	150	20	50	38
LEZ-VPP 150G-22	LEZ-VPP 150G-22-FI	150	40	135	plain bore	190	22	60	54
LEZ-VPP 150G-27	LEZ-VPP 150G-27-FI	150	40	135	plain bore	190	27	60	54
LEZ-VPP 160G-22	LEZ-VPP 160G-22-FI	160	40	135	plain bore	195	22	60	54
LEZ-VPP 160G-27	LEZ-VPP 160G-27-FI	160	40	135	plain bore	195	27	60	54
LEZ-VPP 200G-22	LEZ-VPP 200G-22-FI	200	50	205	plain bore	235	22	60	54
LEZ-VPP 200G-27	LEZ-VPP 200G-27-FI	200	50	205	plain bore	235	27	60	54

Versions / options



	with non-marking grey tyre	with thread guard, pressed steel, zinc-plated	with steel foot guard
Technical description page	52	116	116
Product code suffix	-SG	-FA	-FS
Available for	all	upon request	upon request