


## ALH, GTH, VSTH series

**Heavy-duty wheels**  
with **Blickle Extrathane®** polyurethane tread,  
with aluminium, cast iron or steel wheel centre

360–1,100 kg

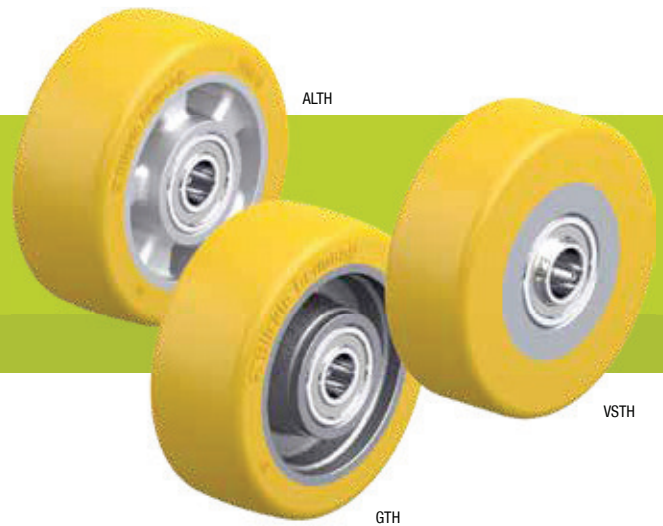

### Wheel: ALH series

- tread: high-quality polyurethane elastomer Blickle Extrathane®, hardness 92 Shore A, colour light brown, non-marking, non-staining
- wheel centre: die-cast aluminium
- overview wheel series page 65

### Wheel: GTH series

- tread: high-quality polyurethane elastomer Blickle Extrathane®, hardness 92 Shore A, colour light brown, non-marking, non-staining
- wheel centre: rugged grey cast iron, lacquered, colour silver, with grease nipple from wheel Ø 150 mm
- overview wheel series page 66

### Wheel: VSTH series

- tread: high-quality polyurethane elastomer Blickle Extrathane®, hardness 92 Shore A, colour light brown, non-marking, non-staining
- wheel centre: steel
- overview wheel series page 66

Wheels	Wheel Ø (D) [mm]	Wheel width (T2) [mm]	Load capacity at 4 km/h [kg]	Load capacity at 10 km/h [kg]	Bearing type	Axle bore Ø (d) [mm]	Hub length (T1) [mm]	Clamping length (T5) [mm]
<b>ALH series</b>								
ALH 101/15K *	100	40	420	–	ball bearing	15	40	40
ALH 140/20K	140	54	800	400	ball bearing	20	60	60
<b>GTH series</b>								
GTH 101/20-50K	100	50	600	–	ball bearing	20	50	50
GTH 110x50/20-46K	110	50	650	–	ball bearing	20	50	46
GTH 125x40/20-48K	125	40	550	–	ball bearing	20	50	48
GTH 127/20-50K	125	50	700	350	ball bearing	20	50	50
GTH 127/25-50K	125	50	700	350	ball bearing	25	50	50
GTH 140X59/20-68K	140	59	800	400	ball bearing	20	68	68
GTH 140X59/25-54K	140	59	800	400	ball bearing	25	68	54
GTH 150/20-50K	150	50	800	400	ball bearing	20	50	50
GTH 150/20-58K	150	50	800	400	ball bearing	20	60	58
GTH 150X54/20-60K	150	54	850	420	ball bearing	20	60	60
GTH 150X55/25-59K	150	55	850	420	ball bearing	25	57	59
GTH 182/25K	180	65	1,100	550	ball bearing	25	75	75
<b>VSTH series</b>								
VSTH 100x40/20-40K	100	40	360	–	ball bearing	20	40	40
VSTH 100x40/20-44K	100	40	360	–	ball bearing	20	44	44
VSTH 100x40/20-43K	100	40	360	–	ball bearing	20	45	43
VSTH 100x40/25-40K	100	40	360	–	ball bearing	25	40	40
VSTH 120x50/25-50K	120	50	540	–	ball bearing	25	50	50
VSTH 125x43/20-49K	125	43	480	–	ball bearing	20	43	49

\* With heavy-duty wheel centre, reinforced design

